




## Placing Seat Sling for Use



Belt should be open and *facing out (as shown)* so that it can be wrapped around patient's waist.

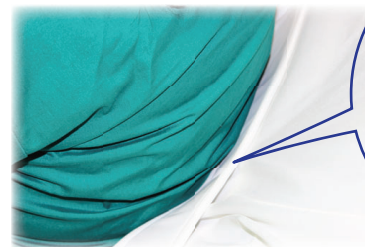


Center and bottom of sling should be at the patient's coccyx area

## Variations in belt attachment

Belt is correct size for patient:



Pull belt around patient's waist

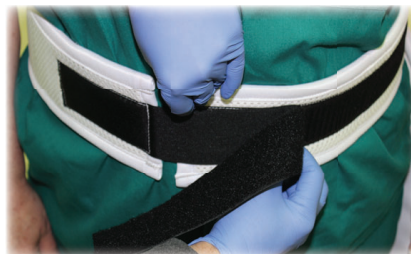

Pull Velcro over so that it is snug, but not too tight




Smooth Velcro over

Belt is too big for patient:



Belt can be folded under to decrease belt length

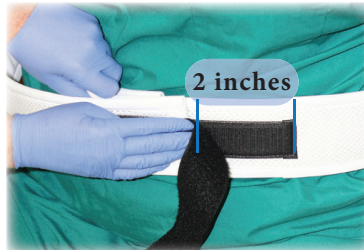

Ensure that **at least 2 inches** of Velcro are attached



Smooth Velcro over

## Strap configuration



*Whether patient is laying down or sitting, the leg wings should come along the sides of patient.*

- A. Pull each leg wing underneath patient's legs just above the knee.
- B. Push one leg strap through the bottom loop of the other leg strap.
- C. Pull strap all the way through - they are now criss-crossed

## Attach straps to hanger bar to transfer patient

FOR SEATED POSITION - Short loop for chest straps and long loop for leg straps.

FOR SEMI-RECLINED TRANSFER - Long loop for chest straps and short loop for leg straps.

