

# A-TSLF8-Series (4pt hanger bar)

SIZE	SWL
46''×86''	1000 Lb/ 454 Kg
50'' × 86''	1000 Lb/ 454 Kg

# **SLING PLACEMENT** ON BED

- If needed, a chuck may be placed between patient and sling.
- Foot label should be at patient's foot.
- Place pillow between legs for knee comfort.

NOTE: The loop number attachments shown are a general guideline. Please adhere to your hospital's policy and use your clinical judgment as to what best meets your patient's needs.

# **USING THE TSL TO TURN PATIENT**

Attach two straps closest to patient's middle area: close to patient's shoulder and hip




1111 South 344th Street, Suite 205 Federal Way, WA 98003 800.273.5749

www.alphamodalities.com

A-TSLF8-Series (4pt hanger bar)

## **SUPINE TRANSFER**

Generally use shorter loop at the head compared to the rest of the body

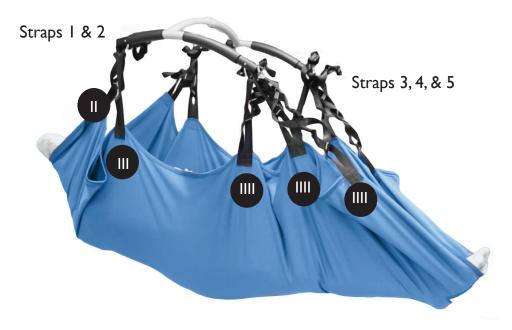

### **INCLINED TRANSFER**

Attach strap 5 if patient tolerates leg hyperextension - otherwise, leave strap unattached



### **Cleaning Instructions**

- Wash Temp not to exceed 185F / 85C
- Drying Medium Heat, not to exceed 165F / 74C
- Oxygen Based Bleach Recommended
- Max Load 850lbs Cycle

#### **DISCLAIMERS:**

- Discontinue use if loose stitching or tears are visible.
- Do not use with an uncleared C-Spine.

Page 2